

欧式通用端子台

TRU TECHNOLOGIES

TRU TECHNOLOGIES (S) PTE LTD
81 TAGORE LANE (TAG.A) #03-12 S(787502)

Tel: +65 6659-2866 Fax: +65 6265-9800
Mobile: +65 9711-6181, 9661-9556

enquiry@tru-technologies.com

欧米式に通用できる端子台
European general terminal block



T022专利号: 201230161014.3
T023专利号: 200930166663.0
T024专利号: 200930166678.7

有关符合EU指令的产品请参阅
附-35



T022/T022-K

T023/T023-K

T024

分类

CPU专用端子台

输入/输出
专用端子台

欧式端子台

日式端子台

新日式端子台

弹片式端子台

辅助型端子台

电源接线端子台

I/O接线模块

继电器模块

继电器配件

电热线

PLC对应电热线

伺服驱动器
信号控制线

伺服电机电热线

步进电机电热线

连接器

多功能LED信号灯

指示灯•按钮

铝型材开关盒

铝型材控制盒

防护型面板盒

防水接线盒

开关电源

无线电子手轮

配线辅助器材

机械标准件

特点 Features

* T022/T022-K为20P连接器对应20P端子连接, 可对应市面上所有带20P MIL插头的PLC连接。

* T023/T023-K为34P连接器对应34P端子连接, 对应KEYENCE的KV-32XA/C、KV-64XA/C、KV-32TA/C、KV-64TA/C扩展板使用。

* T024为40P连接器对应40P端子连接, 体积最小化设计。

* T022/T022-Kは20Pの連結器対応20P端子連結、市場の中で全部の20P MILプラグのPLC連結に対応できます。

* T023/T023-Kは34Pの連結器対応34P端子連結、KEYENCEのKV-32XA/C、KV-64XA/C、KV-32TA/C、KV-64TA/C拡張に对应使用します。

* T024は40P連結器対応40P端子連結、体積は最小型に設計します。

* T022/T022-K is a 20pin terminal connection for 20pin connector, suitable to all PLC connections with 20pin MIL plug on the market.

* T023/T023-K is a 34pin terminal connection for 34pin connector, applicable to KV-32XA/C, KV-64XA/C, KV-32TA/C and KV-64TA/C expansion modules of KEYENCE PLCs.


* T024 is a 40pin terminal connection for 40pin connector, small size for space saving.

⚠️ 注意事项 note

- 订购前请确认PLC引脚定义, 选择适合的端子台。
- 和PLC连接时, 请务必使用本公司开发的与之对应的专用电热线。
- Before ordering, please confirm the PLC pin definition, choose the suitable terminal.
- When PLC connection, please be sure to use the company developed and the corresponding special cable.

适合电热线 Suitable wire

1.5 mm²Following/ AWG16 ;
剥线长度: 6mm



选型参考 Type selection reference

型号 Model	T022	T022-K	T023	T023-K	T024
名称 Name	欧式通用20位端子台		欧式通用34位端子台		欧式通用40位端子台

适用PLC Suitable PLC

OMRON	CJ1W-MD232 CJ1W-MD233				CJ1W-ID231 CJ1W-ID261 CJ1W-MD261(IN) CJ1W-ID232 CJ1W-ID262 CJ1W-ID263 CJ1W-MD263(Out) CJ1W-MD263(IN) CJ1W-MD563(IN) CJ1W-OD231 CJ1W-OD261 CJ1W-MD261(Out)	CJ1W-OD232 CJ1W-OD233 CJ1W-OD262 CJ1W-OD263 CJ1M-CPU21 CJ1M-MD563(Out) CJ1M-CPU22 CJ1M-CPU23
MITSUBISHI	FX1NC-16MT FX1NC-32MT FX2NC-16MT FX2NC-32MT FX3UC-32MT FX2NC-16EX FX2NC-16EX-C	FX2NC-16EX-LC FX2NC-16EYT-C FX2N-10PG FX2N-10GM FX2N-20GM			QX41 QX41-S1 QX42 QX42-S1 QX71 QX72 QX41P	QY42P QY71 QH42P QD70P QD70P QD70D QD75M
KEYENCE		KV-NC16EX KV-NC16ET	KV-C32XA/C KV-C64XA/C KV-C32TA/C KV-C64TA/C	KV-NC32T KV-NC32EX KV-NC32ET KV-NC16EXT		KV-1000 KV-3000 KV-5000 KV-H20S KV-H40S
Panasonic					FPG-XY64D2T/P FP2-C1D FP2-X32D2 FP2-X64D2 FP2-32T/P FP2-Y64T/P FP2-XY64D2T FP2-XY64D7T	FP2-XY64D2P FP2-XY64D7P FP2-PP21 FP2-PP22 FP2-PP41 FP2-PP42 FP2-HSCT FP2-PXYT
SIEMENS						40P Plug with a full range
Yokogawa						F3WD64-3N F3WD32-3F

关联产品 Related products


适用电热线 Suitable cable	X200-2 X218-1 X218-9	X200-3 X210-3	X200-4 X210-4 X210-5 X218-6
	(详情请参阅本目录电热线系列) For details, please refer to the directory cable series		

规格参数 Specifications


输入 Input	额定电流 Nominal opening current	1A
输入 Input	额定电压 Nominal coil voltage	DC24V
输出侧对应 Corresponding output Devices	Servo motor control signal line circuit	Button Switch, Photoelectric Switch, Solenoid, Indicator, Stepping Servo Motor, etc.

外形图 Dimensions


T022/T022-K

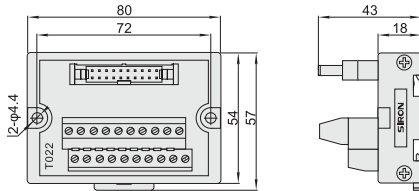

T023/T023-K

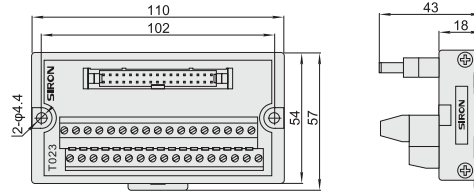

T024

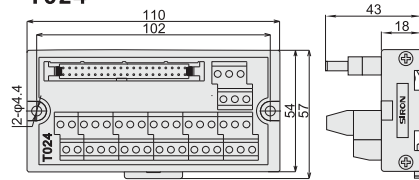


注明: T022(T022-k)外形尺寸相同, T023(T023-k)外形尺寸相同。

Note: T022 and T022-K have the same shape size, T023 and T023-K have the same shape size.


- 用2个M4的螺丝可固定在零件安装的地方。建议使用M4X1.6的螺丝, 螺纹孔深3mm以上。
- 可安装在标准35mm的DIN导轨上
- Screw Mounting: use M4*1.6 screw, screw hole depth > 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.

配线图 Wiring Diagram


T022

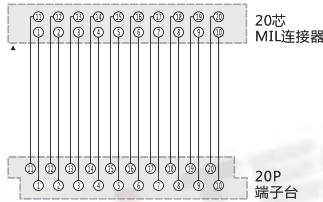


T022-K

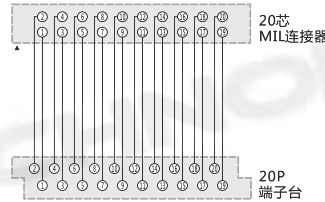


T023

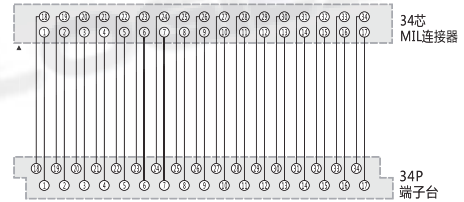

T023-K

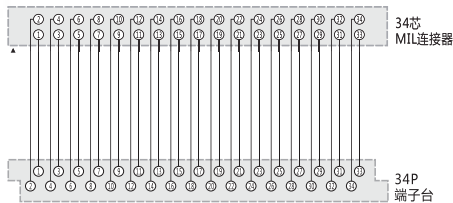

T024

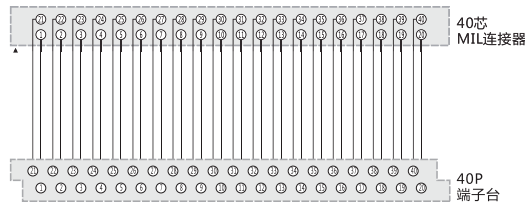

分类

CPU专用端子台

输入/输出
专用端子台

欧式端子台

日式端子台

新日式端子台

弹片式端子台

辅助型端子台

电源接线端子台

I/O接线模块

继电器模块

继电器配件

电缆线

PLC对应电缆线

伺服驱动器
信号控制线

伺服电机电缆线

步进电机电缆线

连接器

多功能LED信号灯

指示灯+按钮

铝型材开关盒

铝型材控制盒

防护型面板盒

防水接线盒

开关电源

无线电子手轮

配线辅助器材

机械标准件